

Brand Image/13/+91 93255 62088



paint your dreams



even paints pvt. ltd.
Plot No. C-4/22, Jejuri MIDC, Tal: Purandhar, Dist: Pune - 412 303
Customer Care: +91 2115 284118
Email: even_paints@yahoo.com
Visit us: www.evenpaints.com

www.evenpaints.com

An ISO 9001:2008 Certified Company

About Even Paints

Even Paints is one of the youngest yet a leading paints manufacturing companies of India. The company has a wide array of product range in decorative and architectural segments covering both interiors and exteriors.

Even Paints is an ISO 9001:2008 certified company located in Maharashtra, India, having wide network of stockist and retailers. It is governed by directors who are well experienced in the paint industry and hence know the customers requirements better. Therefore Even Paints can put forth complete painting solutions as required by customers.

The company is well equipped with state of the art facilities for manufacturing and quality testing which is managed by qualified and trained staff. Even Paints assures its end users the best in the line products manufactured from quality raw materials.

Our Product range presently comprises of water based paints -

- Super First Light - Exterior Acrylic Emulsion Paint
- Slim Fit - Exterior Acrylic Primer
- Prove Fit - Interior Acrylic Primer
- New Elegance - Acrylic Distemper
- Fine Sigma - Acrylic Distemper
- Orchid - Decorative Wall Plast

our in the making products are Interior emulsion paint & water based lustre paint and we are always eager to push new concepts in paints.



Prove Fit - Interior Acrylic Primer

Prove Fit interior Acrylic Primer Water Thinnable is white colour liquid based on polymers. it use as a primer for wall to improve adhesiveness on difficult surface such as RCC surface . Smooth non absorbent cement surface. Old surface, Surface where lime finish.

Direction for Use:

Sand the surface with emery paper 180 and wipe clean. Thin Prove Fit interior Acrylic Primer Water Thinnable with water to obtain brushing consistency and brush if required. Fill dents with putty and let it dry. Apply another coat of primer over putty area and allow it to dry for 4-6 hours. Sand with emery paper 320 and wipe it clean before applying the topcoat.

Safety Precaution:

Stir the contents thoroughly before use. Store Prove Fit Interior Acrylic Primer Water Thinnable and sealer in cool and dry place. Wash the brush / equipment with water immediately after use.

Packing: 1 litre, 4 litres, 10 litres & 20 litres.



Prove Fit
Interior Acrylic Primer
(Water Thinnable)



Super First Light - Exterior Acrylic Emulsion Paint

Even Paints present **Super First Light Exterior Emulsion Paint** when gives the actual true value of the money because even paint provide full confidence & satisfaction of customer in all aspects. Super First Light is best competitive and economic acrylic exterior emulsion paint for all category users. Customer who cannot afford expenses of high quality exterior emulsion paint but they wants to apply emulsion. For those customer those choice is the best semi acrylic emulsion paint which is fit in all budgets because high covering and durability marks it economical.

Direction for Use:

Cleaning: The surface to be painted should be clean dry and free from any loose paint film, chalking. Fungus and algae growth, dirt. Surface imperfection / cranks if any should be done with cement plaster only.

Filling: Surface having fungus growth should be treated with first choice anti-fungus solution followed by through water washing.

Primer: Freshly plastered surface must be allowed to cure completely. On such surface, apply one coat of even paint Slim Fit Exterior Acrylic Primer. Allow the Exterior Acrylic Primer to dry for min. 6 hours.

Topcoat: Apply 2-3 coats by diluting 1 litre of first Choice of even paints with of maximum 750 ml of water. A gap of 4-6 hours should be given between two coats. Ensures that horizontal surface like top of windows. Ledges and other horizontal surface are painted with an additional coat for greater production.

Packing: ½ litre, 1 litre, 4 litres, 10 litres & 20 litres.



Slim Fit - Exterior Acrylic Primer

Slim Fit Exterior Acrylic Primer Water Thinnable is white colour Liquid based on polymer. It used as a primer for exterior wall to improve adhesiveness on difficult surface such as RCC surface, smooth non absorbent cement surface. Old surface, Surface where lime finish.

Direction for Use:

Remove any loose paint, dust, grease, fungus or algae if any by vigorous wire brushing with water. Exterior rough surface previously coated with cement paint should be wire brushed and washed with water thoroughly and allowed to dry. Surface imperfection such as holes and fine crack are to be filled or mixture of white cement and & fine sand only (in the ratio of 1:3). Apply one coat of Slim Fit Exterior Acrylic Primer Water Thinnable by mixing water and paint in the ratio 1:1. Allow drying for 4 hours. Apply recommended no of topcoat.

Safety Precaution:

Stir the contents thoroughly before use. Store Slim Fit Exterior Acrylic Primer Water Thinnable and sealer in cool and dry place. Wash the brush / equipment with water immediately after use.

Packing: 1 litre, 4 litres, 10 litres & 20 litres .



New Elegance - Acrylic Distemper


Direction for Use:

Sand the surface with emery paper 180 and wipe clean. Apply a coat of Slim Fit Acrylic Primer and allow drying it for 6-8 hours. Smoothen the surface by filling dents with thin coats of Orchid Acrylic Putty and allow drying for 4-6 hours. Sand the surface with emery paper 320 and wipe clean. Thin 1 kg of New Elegance Acrylic Distemper with 500-600ml of water. Add water slowly to the paste while continuing to stir the mixture. Apply 2-3 coats of paint with an interval of 6-8 hours between successive coats.

Packing: 1kg , 5kgs , 10kgs & 20kgs in bag.



New
elegance
**Acrylic
Distemper**

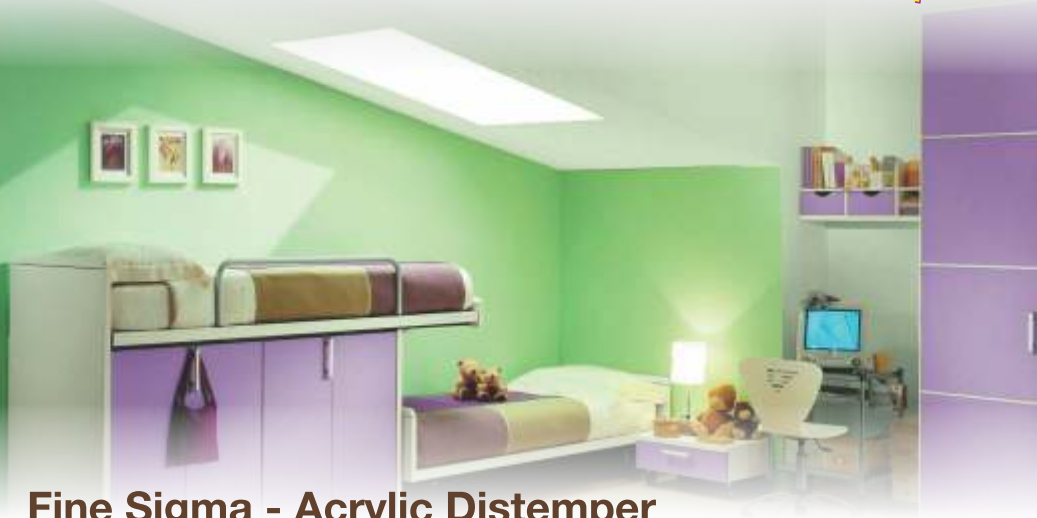

Fine Sigma - Acrylic Distemper

Direction for Use:

Sand the surface with emery paper 180 and wipe clean. Apply a coat of Slim Fit Acrylic Primer and allow drying it for 6-8 hours. Smoothen the surface by filling dents with thin coats of Orchid Acrylic Putty and allow drying for 4-6 hours. Sand the surface with emery paper 180 and wipe it clean. Apply another coat of primer and allow it to dry for 6-8 hours. Sand the surface with emery paper 320 and wipe it clean. Thin 1 kg of Fine Sigma Acrylic Distemper with 500-600ml of water. Add water slowly to the paste while continuing to stir the mixture. Apply 2-3 coats of paint with an interval of 6-8 hours between successive coats.

Packing: 1kg, 5kgs, 10kgs & 20kgs.

FINE
Sigma
Acrylic Distemper





Orchid - Decorative Wall Plast

Direction for Use:

- Clean the surface thoroughly to ensure that it is devoid of loose particles, grease, dust, chalk / fungus, mould, flaky paint etc.
- Thoroughly sand paper surfaces that are already painted, whit washed or if fungus has formed.
- Stop all leakages and seepages before painting. If there are cracks on surface, fill them before painting.
- Allow newly cement plastered and cured surfaces to mature at least for 3 Months.

Priming: Apply one coat of even paint Interior / Exterior Primer after applying. Avoid painting during rains and on wet walls.

Packing: Available in Bags: 1 kg, 5 kgs, 25 kgs

